

Features

- Patented HALIOS® (High Ambient Light Independent Optical System) control loop
- 4 LED Sending Channels, 100mA per channel
- 2 Receiving Channels
- 1 Compensator Channel
- Scalable HALIOS® frequency up to 1MHz
- 16 bit Harvard Architecture H430 CPU
- Configurable CPU system clock frequency: 4, 8, 12 and 24MHz
- 32k Byte Flash
- 4k Byte SRAM and 8k Byte SysROM
- Internal bootloader I²C/SPI
- Programmable window watchdog with independent clock
- 2 or 4 Wire JTAG debug interface
- 1 SPI (Slave)
- 1 High Speed-I²C, 3.4MHz (Slave)
- Ambient light immunity up to 200.000 lux
- Temperature Range -40°C to +85°C
- AEC-Q100 automotive qualified

General Description

The E909.21 controller for proximity and gesture recognition is based on the proven HALIOS® technology. The device is optimized for the use for automotive touch displays. The function principle is based on comparing the light beam, which is reflected by the object to be detected with a reference light beam for most robust object detection. As a result, the device offers best immunity against ambient light, improved sensitivity and automatic calibration over vehicle lifetime. The E909.21 is the first member of a complete product family, which enable scalable solutions for different display sizes, shapes and new HMI concepts.


Applications

- Proximity and gesture recognition for automotive touch displays
- Driver and passenger detection
- Wake-up function for displays
- Touchless control in harsh environments (e.g. explosion protected areas)

Ordering Information

Ordering-No.:	Temp Range	Package
E90921A61C	-40°C to +85°C	QFN32L5

Typical Application Circuit

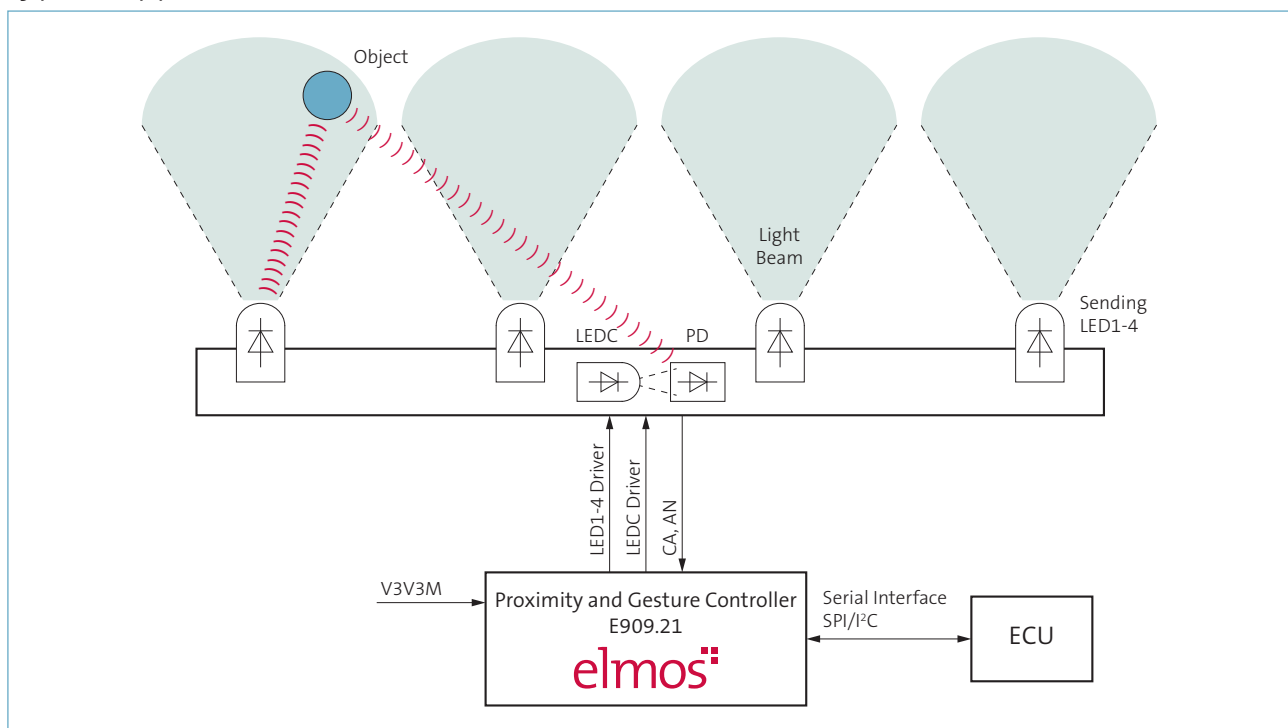

Elmos Semiconductor AG reserves the right to change the detail specifications as may be required to permit improvements in the design of its products.

Elmos Support

Headquarters

Elmos Semiconductor AG
Heinrich-Hertz-Str. 1
44227 Dortmund (Germany)
Phone: +49 (0) 231 / 75 49-100
Fax: +49 (0) 231 / 75 49-149
sales-germany@elmos.com
www.elmos.com

Sales and Application Support Office North America

Elmos NA. Inc.
32255 Northwestern Highway, Suite 220
Farmington Hills, MI 48334 (United States)
Phone: +1 (0) 248 / 8 65 32 00
Fax: +1 (0) 248 / 8 65 32 03
sales-usa@elmosna.com

Sales and Application Support Office China

Elmos Semiconductor Technology (Shanghai) Co., Ltd.
Unit 16B, 16F Zhao Feng World Trade Building,
No. 369 Jiang Su Road,
Chang Ning District,
Shanghai, PR China, 200050
Phone: +86 (0) 21 / 6219 7502
Fax: +86 (0) 21 / 6210 0908 115
sales-china@elmos.com

中国地区销售与应用支持

艾尔默斯半导体技术(上海)有限公司
中国 上海市 长宁区 江苏路369号
兆丰世贸大厦16楼 16B单元, 200050
电话: +86 (0) 21 / 6219 7502
传真: +86 (0) 21 / 6210 0908 115
sales-china@elmos.com

Sales and Application Support Office Korea

Elmos Korea
Office: C-301, Innovalley, 253, Pangyo-ro,
Bundang-gu, Sungnam-si, Gyeonggi-do,
13486 Korea
Phone: +82 (0) 31 714-1131
Fax: +82 (0) 31 8018-0790
sales-korea@elmos.com

Sales and Application Support Office Japan

Elmos Japan K.K.
BR Shibaura N Bldg. 7F
3-20-9 Shibaura, Minato-ku,
Tokyo 108-0023 Japan
Phone: +81 3 / 3451-7101
Fax: +81 3 / 3451-7104
sales-japan@elmos.com

Sales and Application Support Office Singapore

Elmos Semiconductor Singapore Pte Ltd.
3A International Business Park
#09-13 ICON@IBP
609935 Singapore
Phone: +65 (0) 6908 1261
Fax: +65 (0) 6570 5906
sales-singapore@elmos.com

Note: Elmos Semiconductor AG (below Elmos) reserves the right to make changes to the product contained in this publication without notice. Elmos assumes no responsibility for the use of any circuits described herein, conveys no licence under any patent or other right, and makes no representation that the circuits are free of patent infringement. While the information in this publication has been checked, no responsibility, however, is assumed for inaccuracies. Elmos does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of a life-support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications.

Copyright © 2017 Elmos. Reproduction, in part or whole, without the prior written consent of Elmos, is prohibited.